

IP Camera

# VIA-IPC-4MDP-LI2M



**VIA-IPC-4MDP-LI2M** is a 4 MP network camera engineered for high-quality imaging and intelligent perimeter protection.

The device integrates a 1/3» Progressive Scan CMOS sensor with a 2.8 mm fixed focal lens (F1.6) to provide clear and reliable monitoring.

The camera combines Fusion Illumination technology—which integrates IR and white lights—with a built-in arrayed dual-microphone for real-time audio security, and deep-learning-based SMART-TC for precise human and vehicle classification.

Constructed with an aluminum base and a plastic cover, the unit is rated IP67 for water and dust resistance and IK08 for vandal resistance, making it suitable for versatile deployment environments.

## Key Capabilities

- ✓ 4 MP resolution (2688 × 1520)
- ✓ 2.8 mm fixed focal lens
- ✓ Fusion illumination system (IR + White Light), up to 30 m
- ✓ 120 dB true WDR
- ✓ H.265 / H.264 video compression
- ✓ SMART-TC (Smart Target Classification) - Human & vehicle classification
- ✓ Face detection support
- ✓ Built-in arrayed dual-microphone
- ✓ IP67 weather protection, IK08 vandal resistance
- ✓ Support for microSD cards up to 512 GB

VIA Security

 **UKRAINIAN  
BRAND**

# Fusion ILLUMINATION



# SPECIFICATION

## CAMERA

**Image Sensor**

1/3" Progressive Scan CMOS

**Max. Resolution**

2688 × 1520

**Min. Illumination**

Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with light

**Shutter Time**

1/3 s to 1/100,000 s

**Day & Night**

IR cut filter

**Angle Adjustment**

Pan: -30° to 30°, tilt: 0° to 75°, rotate: 0° to 360°

## OPTICAL SYSTEM

**Lens Type**

Fixed focal lens, 2.8 mm

**Focal Length & FOV**

2.8 mm, horizontal FOV 104°, vertical FOV 57°, diagonal FOV 122°

**Lens Mount**

M12

**Iris Type**

Fixed

**Aperture**

F1.6

**Depth of Field**

2.8 mm: 1.4 m to ∞

## ILLUMINATION

**Supplement Light Range**

Up to 30 m

**Supplement Light Type**

IR, White Light

**Smart Supplement Light**

Yes

**IR Wavelength**

850 nm

## VIDEO PROCESSING & ENCODING

**Main Stream**

 50 Hz: 25 fps (2688 × 1520, 1920 × 1080, 1280 × 720);  
 60 Hz: 30 fps (2688 × 1520, 1920 × 1080, 1280 × 720)

**Sub-Stream**

 50 Hz: 25 fps (1280 × 720, 640 × 480, 640 × 360);  
 60 Hz: 30 fps (1280 × 720, 640 × 480, 640 × 360)

**Third Stream**

 50 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360);  
 60 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360),  
 \*Third stream is supported under certain settings.

**Video Compression**

 Main stream: H.265/H.264, Sub-stream: H.265/H.264/MJPEG,  
 Third stream: H.265/H.264,  
 \*Third stream is supported under certain settings.

**Video Bit Rate**

32 Kbps to 8 Mbps

**H.264 Type**

Baseline Profile, Main Profile, High Profile

**H.265 Type**

Main Profile

**Bit Rate Control**

CBR, VBR

**Scalable Video Coding (SVC)**

H.264 and H.265 encoding

**Region of Interest (ROI)**

1 fixed region for main stream and sub-stream

**Target Cropping**

Yes

## AUDIO CAPABILITIES

**Audio Compression**

G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC

**Audio Bit Rate**

 64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps  
 (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64  
 Kbps (AAC-LC)

**Audio Sampling Rate**

8 kHz/16 kHz/32 kHz/48 kHz

**Environment Noise Filtering**

Yes

## NETWORK & CYBERSECURITY

**Protocols**

 TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP,  
 RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP,  
 Bonjour, SSL/TLS, PPPoE, SNMP, WebSocket, WebSockets

**Simultaneous Live View**

Up to 6 channels

**API**

ONVIF (Profile S, Profile G), SDK

**Security**

 Password protection, complicated password, HTTPS encryption,  
 IP address filter, Security Audit Log, basic and digest  
 authentication for HTTP/HTTPS, TLS 1.1/1.2/1.3, WSSE and digest  
 authentication for Open Network Video Interface

**User/Host**

Up to 32 users, 3 user levels: administrator, operator and user

**Network Storage**

NAS (NFS, SMB/CIFS), Auto Network Replenishment (ANR).

**Web Browser**

Plug-in required live view: IE 11, Plug-in free live view: Chrome 80+, Firefox 80+, Edge 89+, Safari 13+, Local service: Chrome 80+, Firefox 80+, Edge 89+, Safari 13+

## IMAGE

**Image Parameters Switch**

Yes

**Image Settings**

Rotate mode

**Day/Night Switch**

Day, Night, Auto, Schedule

**Wide Dynamic Range (WDR)**

120 dB

**SNR**

≥ 52 dB

**Image Enhancement**

BLC, HLC, 3D DNR

**Privacy Mask**

8 programmable polygon privacy masks

## INTERFACE

**Ethernet Interface**

1 RJ45 10 M/100 M self-adaptive Ethernet port

**On-Board Storage**

Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB

**Audio**

Built-in Microphone: Arrayed dual-microphone, 1 output (line out), two-core terminal block

**Reset Key**

Yes

## EVENT

**Basic Event**

Motion detection (support alarm triggering by specified target types (human and vehicle), video tampering alarm, exception

**Smart Event**

Face detection

**Linkage**

Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger recording, trigger capture

## DEEP LEARNING FUNCTION

**Perimeter Protection**

Line crossing, intrusion, Support alarm triggering by specified target types (human and vehicle)

## GENERAL

**Power**

12 VDC ± 25%, 0.5 A, max. 6 W, Ø 5.5 mm coaxial power plug, reverse polarity protection; PoE: IEEE 802.3af, Class 3, max. 7 W

**Material**

Base: aluminum, cover: plastic

**Dimension**

Ø 110 mm × 59.2 mm (Ø 4.33" × 2.33")

**Package Dimension**

150 mm × 150 mm × 141 mm (5.91" × 5.91" × 5.55")

**Weight**

Approx. 390 g (0.9 lb.)

**With Package Weight**

Approx. 606 g (1.3 lb.)

**Storage Conditions**

-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)

**Startup and Operating Conditions**

-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)

**Language**

Multi-language interface including English, Ukrainian, Russian and additional international languages.


**General Function**

Heartbeat, mirror, flash log, password reset via email, pixel counter, anti-banding

**Protection**

IP67, IK08

## DIMENSIONS

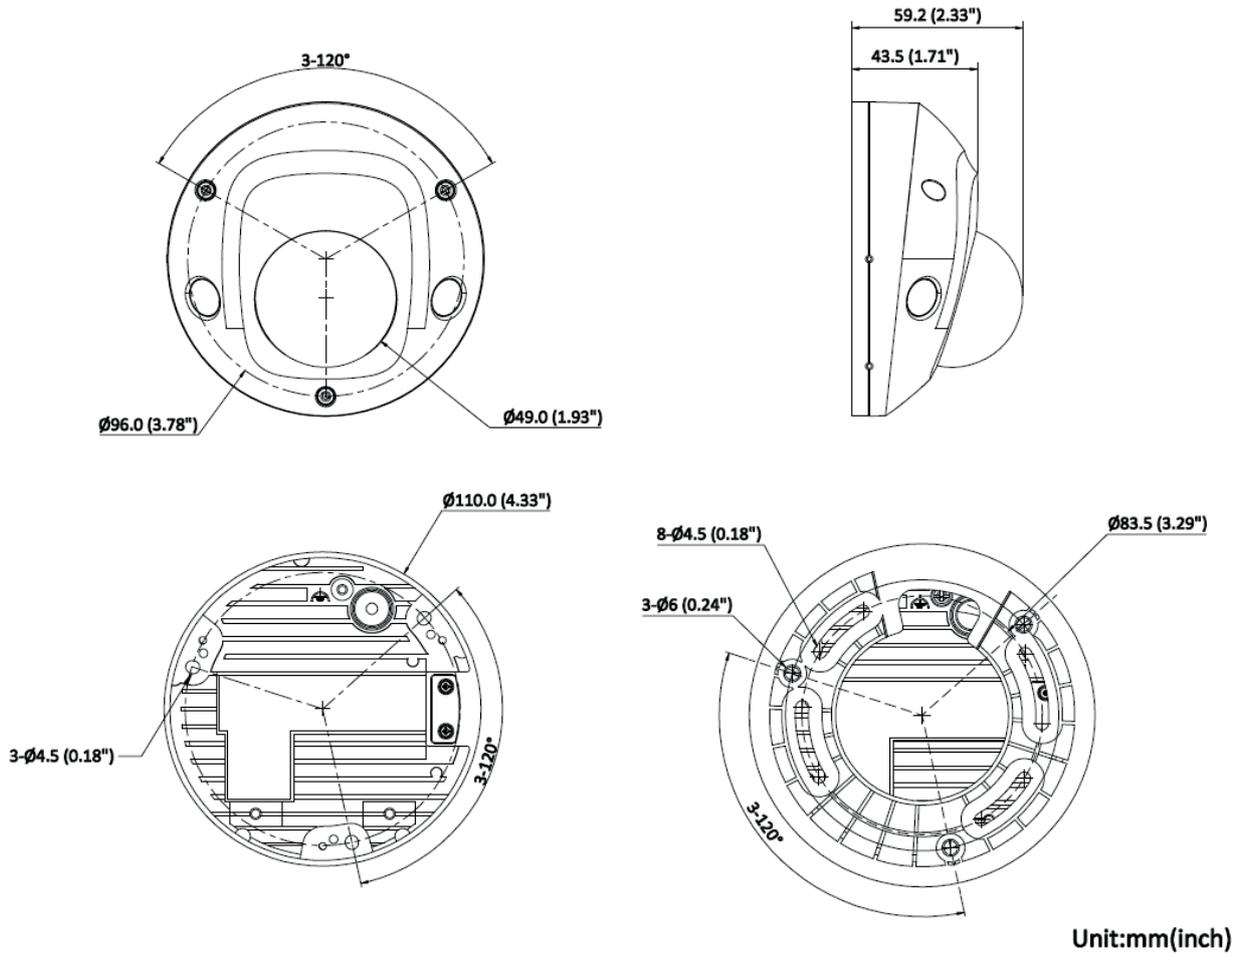

\*Product in box may vary in appearance and specifications.



Limited liability company «VIATEK»

Email: [info@viasecurity.ua](mailto:info@viasecurity.ua)  
 For more detailed information: [viasecurity.ua](http://viasecurity.ua)

**UKRAINIAN  
BRAND**