

IP Camera

VIA-IPC-6DP-LIV2M



The **VIA-IPC-6DP-LIV2M** is a 6-megapixel network dome camera engineered for intelligent monitoring and easy installation.

The device integrates a 1/2.4» Progressive Scan CMOS sensor with a 2.8 to 12 mm motorized varifocal lens featuring an F1.6 aperture, delivering clear color imaging in low-light environments down to 0.005 Lux.

The camera combines Fusion Illumination (integrating IR and white lights) with a range of up to 40 m, 120 dB true WDR technology, deep-learning-based SMART-TC for human and vehicle classification, and a built-in arrayed dual-microphone for high-quality audio security.

Constructed with a robust metal dome housing, the unit is rated IP67 for water and dust resistance and IK10 for vandal protection, making it highly durable for demanding deployments.

Key Capabilities

- ✓ 6 MP resolution (3200 × 1800)
- ✓ Motorized 2.8 to 12 mm varifocal lens
- ✓ 120 dB WDR
- ✓ H.265 / H.264 video compression
- ✓ Fusion illumination system (IR + white light), up to 40 m
- ✓ SMART-TC (Smart Target Classification) - Human & vehicle classification
- ✓ Face detection support
- ✓ Built-in arrayed dual-microphone
- ✓ IP67 weather protection, IK10 vandal resistance
- ✓ Support for microSD up to 512 GB

VIA Security

 **UKRAINIAN
BRAND**

Fusion ILLUMINATION



SPECIFICATION

CAMERA

Image Sensor

1/2.4" Progressive Scan CMOS

Max. Resolution

3200 × 1800

Min. Illumination

Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with light

Shutter Time

1/3 s to 1/100,000 s

Day & Night

IR cut filter

Angle Adjustment

Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°

OPTICAL SYSTEM

Lens Type

Varifocal lens, motorized lens, 2.8 to 12 mm

Focal Length & FOV

2.8 to 12 mm, horizontal FOV 102.3° to 35°, vertical FOV 53.9° to 19.7°, diagonal FOV 122.9° to 40.1°

Lens Mount

Ø 14

Iris Type

Fixed

Aperture

F1.6

ILLUMINATION

Supplement Light Range

Up to 40 m

Supplement Light Type

IR, White Light

Smart Supplement Light

Yes

IR Wavelength

850 nm

VIDEO PROCESSING & ENCODING

Main Stream

50 Hz: 25 fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720); 60 Hz: 30 fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)

Sub-Stream

50 Hz: 25 fps (1280 × 720, 640 × 480, 640 × 360); 60 Hz: 30 fps (1280 × 720, 640 × 480, 640 × 360)

Third Stream

50 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360); 60 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360), *Third stream is supported under certain settings.

Video Compression

Main stream: H.265/H.264; Sub-stream: H.265/H.264/MJPEG; Third stream: H.265/H.264, *Third stream is supported under certain settings.

Video Bit Rate

32 Kbps to 16 Mbps

H.264 Type

Baseline Profile, Main Profile, High Profile

H.265 Type

Main Profile

Bit Rate Control

CBR, VBR

Scalable Video Coding (SVC)

H.264 and H.265 encoding

Region of Interest (ROI)

1 fixed region for main stream and sub-stream

Target Cropping

Yes

AUDIO CAPABILITIES

Audio Compression

G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC

Audio Bit Rate

64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 160 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)

Audio Sampling Rate

8 kHz/16 kHz/32 kHz/48 kHz

Environment Noise Filtering

Yes

NETWORK & CYBERSECURITY

Protocols

TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP, WebSocket, WebSockets

Simultaneous Live View

Up to 6 channels

API

ONVIF (Profile S, Profile G), SDK

Security

Password protection, complicated password, HTTPS encryption, IP address filter, Security Audit Log, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2/1.3, WSSE and digest authentication for Open Network Video Interface

User/Host

Up to 32 users, 3 user levels: administrator, operator, and user

Network Storage

NAS (NFS, SMB/CIFS), Auto Network Replenishment (ANR)

Web Browser

Plug-in required live view: IE 11; Plug-in free live view: Chrome 80+, Firefox 80+, Edge 89+, Safari 13+; Local service: Chrome 80+, Firefox 80+, Edge 89+, Safari 13+

IMAGE

Image Parameters Switch

Yes

Image Settings

Rotate mode

Day/Night Switch

Day, Night, Auto, Schedule

Wide Dynamic Range (WDR)

120 dB

SNR

≥ 52 dB

Image Enhancement

BLC, HLC, 3D DNR

Privacy Mask

8 programmable polygon privacy masks

INTERFACE

Ethernet Interface

1 RJ45 10 M/100 M self-adaptive Ethernet port

On-Board Storage

Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB

Audio

Built-in Microphone: Arrayed dual-microphone, 1 input (line in), two-core terminal block, 1 output (line out), two-core terminal block

Alarm

1 input, 1 output (max. 24 VDC/24 VAC, 1 A)

Reset Key

Yes

EVENT

Basic Event

Motion detection (support alarm triggering by specified target types (human and vehicle), video tampering alarm, exception

Smart Event

Face detection

Linkage

Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger alarm output, trigger recording, trigger capture

DEEP LEARNING FUNCTION

Perimeter Protection

Line crossing, intrusion, Support alarm triggering by specified target types (human and vehicle)

GENERAL

Power

12 VDC ± 25%, 0.88 A, max. 10.56 W, Ø 5.5 mm coaxial power plug, reverse polarity protection; PoE: IEEE 802.3af, Class 3, max. 12.5 W

Material

Metal

Dimension

Ø 121.5 mm × 97.6 mm (Ø 4.78" × 3.84")

Package Dimension

150 mm × 150 mm × 141 mm (5.9" × 5.9" × 5.5")

Weight

Approx. 620 g (1.4 lb.)

With Package Weight

Approx. 880 g (1.9 lb.)

Storage Conditions

-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)

Startup and Operating Conditions

-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)

Language

Multi-language interface including English, Ukrainian, Russian and additional international languages.


General Function

Heartbeat, mirror, flash log, password reset via email, pixel counter, anti-banding

Protection

IP67, IK10

DIMENSIONS

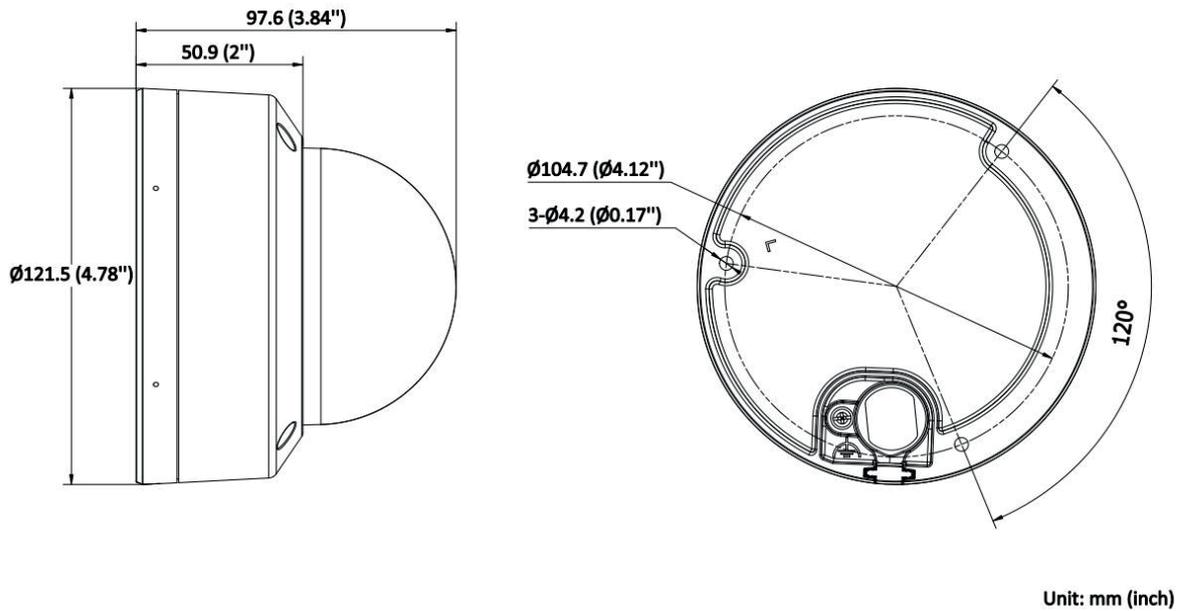

*Product in box may vary in appearance and specifications.



Limited liability company «VIATEK»

Email: info@viasecurity.ua
For more detailed information: viasecurity.ua

**UKRAINIAN
BRAND**